(a) Minimum Dimensions 535e 12 3 to 12 inches nohes (b) Maximum Dimensions 3 to 12 inches 24 inches height 35 inches 128. Triangle height is equal to 1.5 times the base dimension. Vield lines may be smaller than suggested when installed on much narrower, slow-speed facilities such Direction of travel as shared-use paths.

Figure 3B-16. Recommended Yield Line Layouts

<u>APPENDIX "a"</u>: California MUTCD [Figure 3B-16] ~ Yield Line Layout ATTACHMENTS

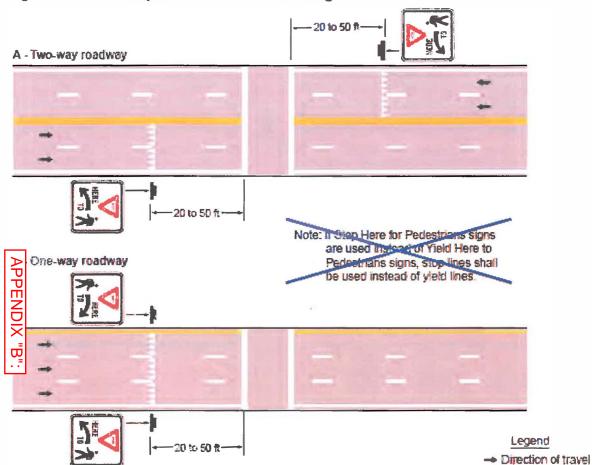


Figure 3B-17. Examples of Yield Lines at Unsignalized Midblock Crosswalks

<u>APPENDIX "a"</u>: California MUTCD [Figure 3B-17] ~ Crosswalk Layout ATTACHMENTS